



Power Amplifiers

EN 54-16

ABT-PA8080B / ABT-PA4160B / ABT-PA8160B
ABT-PA1650B / ABT-PA2650B

- ✓ *Compliance with EN 54-16*
- ✓ *Can be used in every Public Address System*
- ✓ *Designed for the MULTIVES system*




We make everyday life safer

ABT-PA8080B / ABT-PA4160B / ABT-PA8160B ABT-PA1650B / ABT-PA2650B

EN 54-16

POWER AMPLIFIERS

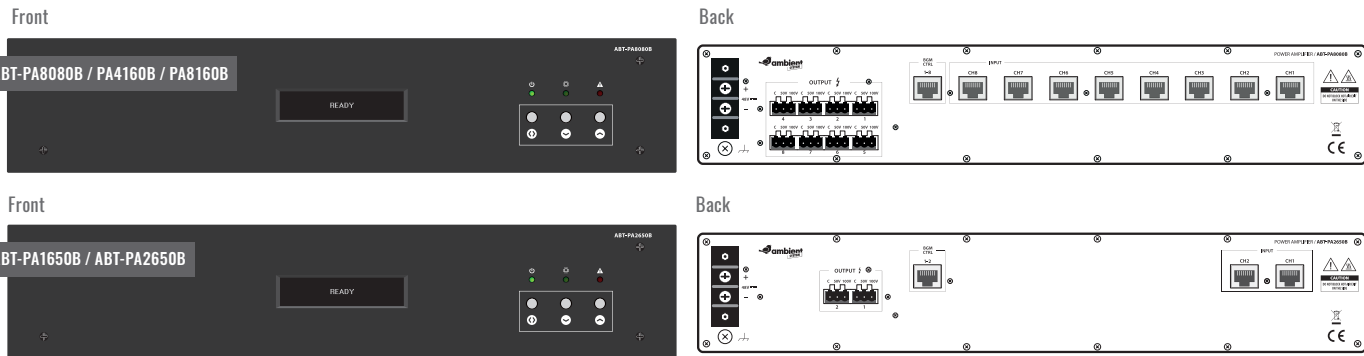

The Amplifiers are designed for perfect integration into the Ambient System solutions. Thanks to their flexibility, they can also be used for any other Public Address and Voice Evacuation applications. These amplifiers have been developed to meet the specific requirements of the EN 54-16 standard for safety installations.

The ABT-PAXXXXB is a family of 2U, rack mountable, 8-channel (ABT-PA8080B, ABT-PA8160B), 4-channel (ABT-PA4160B), 2 channel (high power ABT-PA2650B) and 1 channel (ABT-PA1650B) class-D transformer isolated power amplifiers for 50 V and 100 V distributed loudspeaker systems. Amplifier ABT-PA8080B can deliver up to 8x 80W, for ABT-PA8160B and ABT-2650B

delivering power increases respectively to the 8x 160 W and 2x 650 W. In a bridged mode amplifier channels are combined and can deliver 4x 160 W for ABT-PA8080B, 4x320 W for ABT-PA8160B and 1x 1300 W for ABT-PA2650B. These amplifiers have 48 VDC input which allows to connect with battery backup system for maximum availability and durability in an voice evacuation system.

The ABT-PAXXXXB amplifiers are powered from external power supply module ABT-PS48800 working in a block. The current from block is distributed to individual amplifiers through the “power manager” ABT-PSM48 (device includes a battery charger and is in compliance with EN 54-4).

ABT-PA8080B / 8 x 80 Watt class-D power amplifier

Can be bridge into: 1x 160 W + 6x 80 W; 2x 160 W + 4x 80 W; 3x 160 W + 2x 80 W or 4x 160 W

ABT-PA4160B / 4 x 160 Watt class-D power amplifier

Can be bridge into: 1x 320 W + 2x 160 W or 2x 320 W

ABT-PA8160B / 8 x 160 Watt class-D power amplifier

Can be bridge into: 1x 320 W + 6x 160 W; 2x 320 W + 4x 160 W; 3x 320 W + 2x 160 W or 4x 320 W

ABT-PA1650B / 1 x 650 Watt class-D power amplifier

ABT-PA2650B / 2 x 650 Watt class-D power amplifier

Can be bridge into: 1x 1300 W

ABT-PAXXXXB casings: are 2U high, 19-inch rack mountable.

CHARACTERISTICS

» Front panel indicators include:

- › Supply
- › Active
- › Fault

» 100 / 50 Volt available via terminal blocks at the rear

» Output channels can be linked into:

- › **ABT-PA8080B, ABT-PA4160B, ABT-PA8160B:**
4x 160 W, 2x 320 W or 4x 320 W by daisy-chaining 50 V tapping (input on parallel)
- › **ABT-PA2650B:**
1x 1300 W by daisy-chaining 50 V tapping (input on parallel)

» ABT-PAXXXXB series combines with the ABT-PSM48 Power Supply Manager (charger and back-up supply)

	ABT-PA8080B	ABT-PA4160B	ABT-PA8160B	ABT-PA1650B	ABT-PA2650B
Power supply					
Nominal DC input voltage	48 V				
DC input voltage range	42 – 57 V				
DC fuse rating (internal)	6x 7,5 AF-H	2x 15 AF- H 2x 7,5 AF-H	4x 15 AF-H 2x 7,5 AF-H	1x 15 AF- H 2x 7,5 AF-H	2x 15 AF- H 2x 7,5 AF-H
Overall power efficiency nominal DC input max output power at 1 kHz	80%				
Power consumption (48 V DC)					
Standby	0,2 A	0,18 A	0,2 A	0,15 A	0,15 A
Active	0,7 A	0,43 A	0,7 A	0,23 A	0,33 A
Max. nominal current	20 A	19 A	38 A	19 A	38 A
Amplifier					
Continuous nominal output power per channel, all channels driven into nominal load at 1 kHz 30°C ambient	80 W 125 Ω / 100 nF	160 W 62 Ω / 200 nF	160 W 62 Ω / 200 nF	650 W 15,4 Ω / 200 nF	650 W 15,4 Ω / 200 nF
Continuous nominal output power per channel, all channels driven into nominal load at 1 kHz 55°C ambient	TBA				
Nominal balanced input level for 100 V output at 1 kHz and nominal load	1 V				
Max balanced input level	3 V				
Input impedance at 1 kHz	22 kΩ				
Input common mode rejection at <1 kHz	>61 dB				
Frequency response (-6 dB)	75 Hz – 20kHz 125 Ω / 100 nF	75 Hz – 20kHz 62 Ω / 200 nF	75 Hz – 20kHz 62 Ω / 200 nF	75 Hz – 22kHz 15,4 Ω / 200 nF	75 Hz – 22kHz 15,4 Ω / 200 nF
S/N ref nominal power at 1 kHz 22 Hz – 22 kHz	>85 dB 125 Ω / 100 nF	>85 dB 62 Ω / 200 nF	>85 dB 62 Ω / 200 nF	>85 dB 15,4 Ω / 200 nF	>85 dB 15,4 Ω / 200 nF
THD power 1 kHz (42 V – 57 V)	< 10%				
Crosstalk between channel 50 Hz – 20 kHz nominal load dB	< -70 dB 125 Ω / 100 nF	< -70 dB 62 Ω / 200 nF	< -70 dB 62 Ω / 200 nF	< -70 dB 15,4 Ω / 200 nF	< -70 dB 15,4 Ω / 200 nF
Connectivity					
DC input socket	DG58C-A-2P13				
Audio output socket	3 pin PHOENIX 5.08 mm				
Nominal output voltage taps V	50 / 100				
Mechanical					
Front panel width	482 mm				
Back panel width	445 mm				
Height	88.5 mm				
Net Weight	15 kg	13 kg	18,6 kg	10,8 kg	15 kg
Gross weight (including packaging)	16,2 kg	14,2 kg	19,8 kg	12 kg	16,2 kg
Packaging dimensions	150 x 530 x 610 mm				



We make everyday life safer

Ambient System products are continually improved. All specifications are therefore subject to change without prior notice.

v. 4.0