

ABT-SW176X

EN 54-24

SURFACE MOUNTED SPEAKER STROBE

- ✓ *Compliance with EN 54-24*
- ✓ *Compliance with BS5839-8 standard (thermal protection)*

**NEW!**

The ABT-SW176X is an multi-function loudspeaker designed to guarantee the highest acoustic parameters. ABT-SW176X is equipped with a LED Strobe that provide visible notification in the case of emergency. The loudspeaker can be mounted either on a wall or on a ceiling. Our loudspeakers are perfect on any circulation routes and in stair-cases located in shopping centres, offices, schools, hotels, hospitals, and industrial buildings. The loudspeaker mingles well with any interior and is virtually invisible thanks to its small dimensions and neat white finish. The loudspeaker offers adjustable power regulation through connectivity to applicable transformer tapings thus

allowing suitable acoustic pressure (the level of sound) within areas of sound emission adequately to the acoustic conditions existing in those areas.

To be quite sure our loudspeakers comply with the highest quality standards we test them thoroughly following the most meticulous procedures that warrant excellent parameters of sound emission, safety, and reliability. They are also recommended for use in any and all public address systems.


CHARACTERISTICS

- » **LED Strobe for visible notifications**
- » **Easy and quick to mount**
- » **High quality sound of both speech and music**
- » **Ideal for on-wall or on-ceiling mounting**
- » **6 W transformer with multiple branches ensuring accurate selection of output power**



	ABT-SW176X
Electrical	
Rated power, W	6
Tappings 100 V line according to EN 54-24, W	6 / 3 / 1,5 / 0,75
Tappings 70 V line, W	3 / 1,5 / 0,75 / 0,37
Transformer impedance @ 100 V, Ω	1667 / 3333 / 6667 / 13333
Driver impedance, Ω	8
Effective frequency range, Hz	130 – 20 000
Sensitivity @ 4 m, 1 W, dB	76
SPL @ 4 m, rated power, dB	82
SPL @ 1 m, 1 W, dB, test signal bandwidth 300 Hz – 6 kHz	88
SPL @ 1 m, rated power, dB, test signal bandwidth 300 Hz – 6 kHz	94
Dispersion at 500 Hz / 1 kHz / 2 kHz / 4 kHz, [°]	180 / 175 / 75 / 40
Environmental	
Environmental type / IP Rating according to EN 54-24	A / IP21C
IP Rating	32
Min./max. ambient temperature	-10°C / 55°C
Mechanical	
Dimensions, mm	Height 80, $\varnothing$ 170
Net weight, kg	1,2
Colour	White (RAL 9003)
Material	Steel
Mounting	Screw
Option	
For DC line monitoring	Capacitor
Colour optional	RAL palette
LED Strobe	
Rated Voltage	24 VDC
Luminous intensity	30 cd
Flash frequency	1,5 Hz

Frequency band:

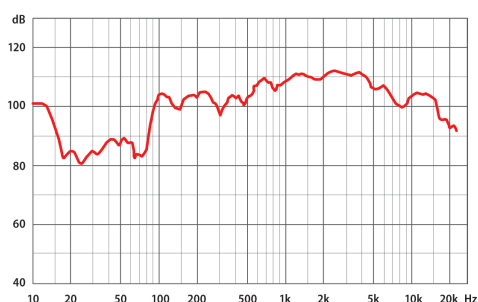

Circular chart of directional characteristic:

