


ABT-WVC

WALL-MOUNTED VOLUME CONTROLLER

- ✓ *Volume controller with touchscreen*
- ✓ *Routing and volume control of input and output signals*
- ✓ *4.3-inch touchscreen*
- ✓ *Power supply via Ethernet (PoE)*
- ✓ *Maximum CAT5e cable length up to 100 meters*



The ABT-WVC wall-mounted volume controller is equipped with a 4.3-inch touchscreen display. It is designed for remote control of ABT-MX6 and ABT-MX12 matrices in terms of volume control and signal routing. It also allows you to select presets and displays detailed information about the system status. The display shows signal levels in real time and allows them to be adjusted and muted. The device is equipped with three LEDs that indicate the operating status of the device: the blue PWR LED indicates power, the green COMM LED indicates communication, and the red FAIL LED indicates a device malfunction.

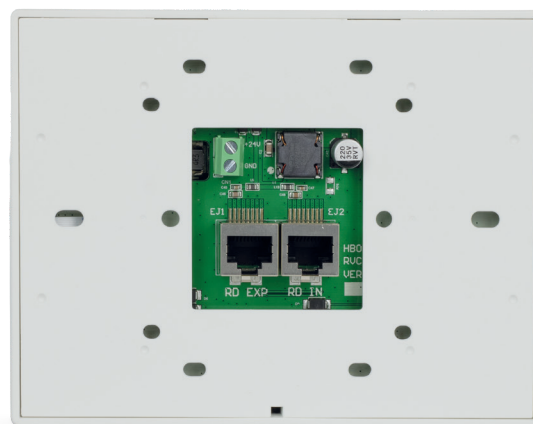

	ABT-WVC
Electrical Parameters	
Power Supply	24V DC (via RD port)
Indicators	blue PWR LED: power supply green COMM LED: communication red FAIL LED: failure
Interfaces	
RD IN input (to matrix)	RJ45, CAT-5e cable, 100 m
RD EXP input (for linking)	RJ45, CAT-5e cable, 100 m
Mechanical Parameters	
Dimensions	196 × 45 × 128 mm (W × D × H)
Weight	0,489 kg

