


ABT-xAudi-8

EN 54-16
8 audio input card for function slot


1488-CPR-0500/W

3959/2020

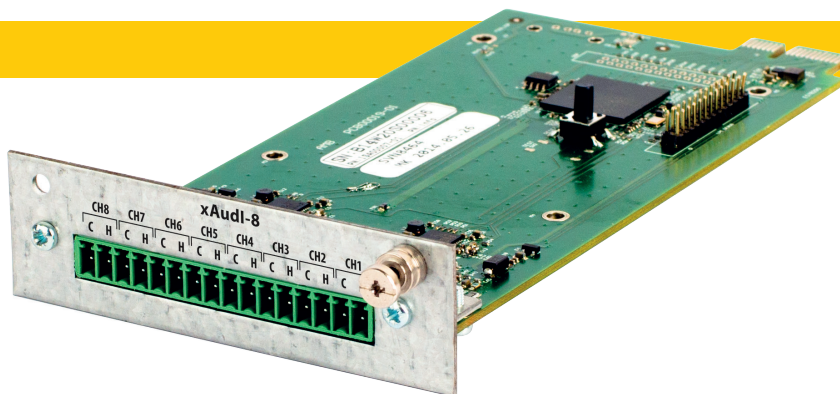

	ABT-xAudi-8
Number of audio inputs	8
Type of audio inputs	differential
Connector type	16-pin screw terminal type PHOENIX, 3.5 mm
Input impedance	$\geq 10 \text{ k}\Omega$
Maximum input voltage	$\leq 3 \text{ Vrms}$
Operating temperature	0°C to 60°C
Operating humidity	15% to 80% (non-condensing)
Storage temperature	-20°C to 70°C
Storage humidity	5% to 95% (non-condensing)
Dimensions	70 x 160 x 25 (mm)

This audio input extension card is destined for a function slot of ABT-CU-8 LCD. It offers 8 symmetrical line audio inputs via an RJ45 connector.